


POTOP

过滤压力值测试仪

- ◆ 高强度欧标一体化机架，304不锈钢桌面，实用美观
- ◆ 配手动板式换网器，多孔板经氮化处理，硬度高，耐磨损
- ◆ 选用国际知名品牌（GEFRAN）熔体压力传感器，测试数据精度高
- ◆ 高性能伺服电机，调速范围广，转速更稳定

■ 主要技术指标

型 号	单 位	CMSI-20/28
螺杆直径	mm	20
螺杆长径比		28
螺杆转速	rpm	0-120
熔体泵额定流量		60cm ³ /min(5cc)
压力测量范围/精度	F.S	0-500bar, 0.5%
加热/冷却方式		电加热/风机冷却
滤网板1		双层结构，过滤层615×108目
滤网板2		双层结构，过滤层615×132目
滤网板3		三层结构，过滤层165×1400目
最高产量	kg/h	2
额定功率	KW	3
整机重量	KG	约450
长×宽×高	mm	1215×635×1265

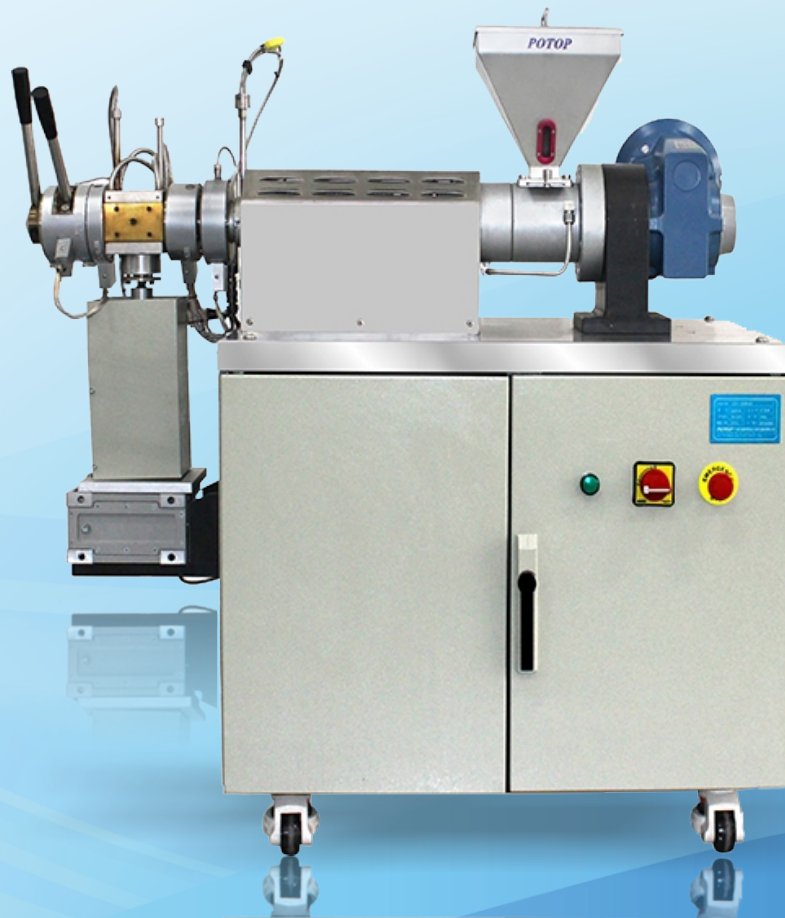

广州市普同实验分析仪器有限公司

Guangzhou POTOP Co., Ltd

地址：广州市番禺区大龙街旧水坑村开发路3-40号

技术支持热线：+86 20 39283063 电话：+86 20 39283061 传真：+86 20 39283062 网址：www.potop.com.cn E-mail:info@potop.com.cn

华南理工大学聚合物新型成型装备国家工程研究中心番禺分中心
聚合物新型成型装备制造商




POTOP

Filter Pressure Value (FPV) Tester

- ◆ High-strength European standard integrated frame, 304 stainless steel table top, practical and beautiful
- ◆ Equipped with manual plate type screen changer, perforated plate is nitrided, with high hardness and wear resistance
- ◆ The melt pressure sensor of international famous brand (GEFRAN) is selected, and the test data has high accuracy
- ◆ High-performance servo motor, wide speed range, more stable speed

■ Features

Item	Unit	CMSI-20/28
Screw diameter	mm	20
Screw length to diameter ratio		28
Screw speed	rpm	0-120
Rated flow of melt pump		60cm ³ /min(5cc)
Pressure measurement range/accuracy	F.S	0-500bar, 0.5%
Heating/cooling method		Electric heating/fan cooling
Filter plate 1		Double layer structure, filter layer 615 × 108 mesh
Filter plate 2		Double-layer structure, filter layer 615 × 132 mesh
Filter plate 3		Three-layer structure, filter layer 165 × 1400 mesh
Max. production	kg/h	2
Rated power	KW	3
Total Weight	KG	Approx. 450
L × W × H	Mm	1215 × 635 × 1265

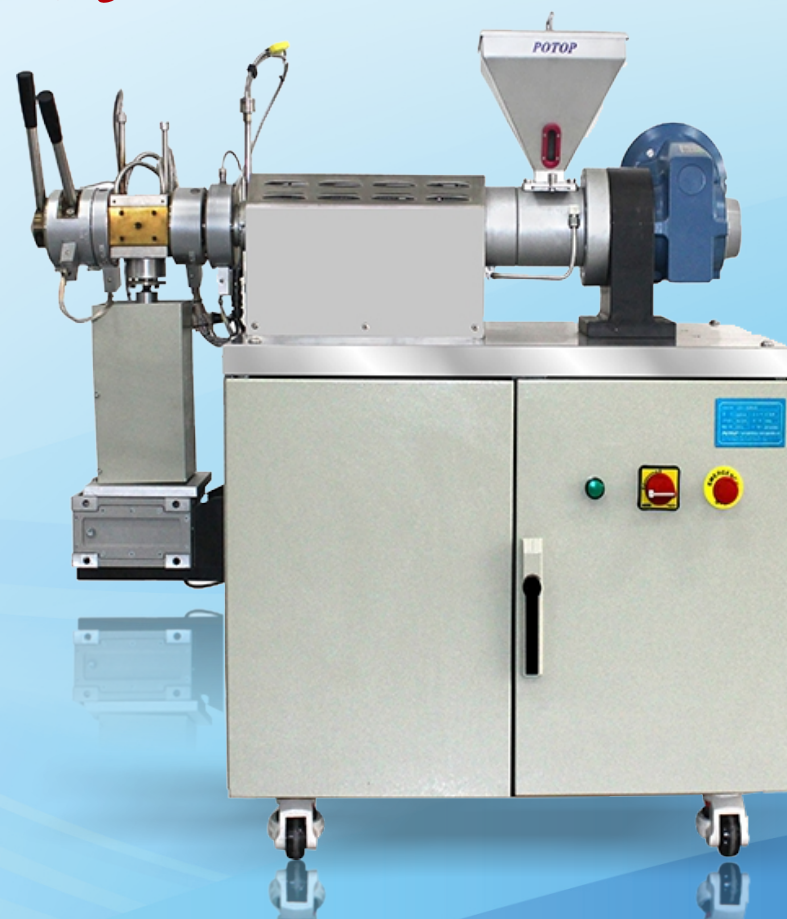

广州市普同实验分析仪器有限公司
Guangzhou POTOP Co., Ltd

NERC for new polymer forming equipment of SCUT
Manufacturer of new polymer forming equipment

Tel: +86 20 39283061 Fax: +86 20 39283062 web: www.potop.com.cn E-mail: info@potop.com.cn

